> BLACKBOX™ RACK MOUNT CASES

These lightweight, compact, and double ended cases offer light to medium duty protection and boast significantly better light duty shock performance than the competition. The use of recycled materials in the shell and a sturdy steel frame offer great value while upholding Peli-Hardigg's industry-leading standards. When you need to be cost-conscious but can't sacrifice performance, BlackBox is the answer.

- 24" (61 cm) Rugged steel rack frame with 10-32 threads designed to meet ANSI/EIA 310-C
- Rack designed for applications up to 100 lbs. (45 kg) of equipment with a typical fragility rating of 40-80 G.
- Shock mounts provide 2" (5.1cm) of sway space to isolate equipment
- 2" (5.1cm) lid and 5" (12.7cm) lid with edge casters





> BLACK BOX SPECIFICATIONS								
CATALOGUE NUMBER	BB0030-0000-110E	BB0040-0000-110E BB0040-0000-110E		BB0050-0000-110E BB0070-0000-110E		BB0110-0000-110E	BB0140-0000-110	
U Size	3U	4U	5U	7U	9U	11U	14U	
Rack Height*	5.25" (13.3 cm)	7.00" (17.8 cm)	8.75" (22.2 cm)	12.25" (31.1 cm)	15.75" (40 cm)	19.25" (48.9 cm)	24.50" (62.2 cm)	
Rack Length*	Length* 24.00" (61.0 cm) 24.00"		24.00 " (61.0 cm)	24.00" (61.0 cm)	24.00" (61.0 cm)	24.00" (61.0 cm)	24.00" (61.0 cm)	
Rack Width*	Width* 19.00" (48.3 cm) 19.00" (48.3 cm)		19.00" (48.3 cm)	19.00" (48.3 cm)	19.00" (48.3 cm)	19.00" (48.3 cm)	19.00" (48.3 cm)	
Lid I.D.* Front/Back ¹	2.20/5.20" (5.6/13.2 cm)	2.20/5.20" (5.6/13.2 cm)	2.20/5.20" (5.6/13.2 cm)	2.20/5.20" (5.6/13.2 cm)	2.20/5.20" (5.6/13.2 cm)	2.20/5.20" (5.6/13.2 cm)	2.20/5.20" (5.6/13.2 cm)	
Length* O.D. ²	38.50" (97.8 cm)	38.50" (97.8 cm)	38.50" (97.8 cm)	38.50" (97.8 cm)	38.50" (97.8 cm)	38.50" (97.8 cm)	38.50" (97.8 cm)	
Width* O.D.	24.60" (62.5 cm)	24.60" (62.5 cm)	24.60" (62.5cm)	24.60" (62.5 cm)	24.60" (62.5 cm)	24.60" (62.5 cm)	24.60 " (62.5 cm)	
Height* O.D.³	11.40" (28.9 cm)	13.10" (33.3 cm)	14.90" (37.8 cm)	18.40" (46.7 cm)	21.90" (55.6 cm)	25.40" (64.5 cm)	30.60" (77.7 cm)	
Weight*	42 lbs. (19.05 kg)	47 lbs. (21.32 kg)	48 lbs. (21.77 kg)	51 lbs. (23.13 kg)	56 lbs. (25.4 kg)	60 lbs. (27.22 kg)	66 lbs . (29.94 kg)	
Features	• Engineered racks provide a secure and mobile electronics enclosure • 2 wheels • Lightweight and compact • Shock mounts provide 2" (5.1cm) of sway space to isolate equipment • Molded-in rib design provides secure stacking and interlock • Patented wide-design Comfort Grip Handles" make lifting easy • Black hardware is long-lasting and fastens securely • Automatic pressure relief valve • Airtight and watertight							
Application	Audio/Video recording and processing systems, Satellite communication systems, Radio communication systems,							

- * All dimensions are approximate. All BlackBox™ rackmount cases are available exclusively in black.
- 1- Lid Outside Dimension (O.D.) = Lid I.D. plus 1.3" (3.3 cm) on 5.2" (13.2 cm) lids and plus 1.1" (2.8 cm) on 2.2" (5.6 cm)

Seismic data recording instrumentation, Climate data collection

² - Length includes stiffening ribs ³ - Height excludes .4" (1.1cm) stacking ribs









> MEET THE OTHER **HALF OF PELI**

The same durability and ingenuity built into every Peli Case also sets our torches apart. We're illuminating the world's darkest and most dangerous places with specialised lighting tools:

- Specialised lights for
- Submersible lights for diving

PELI 1 YEAR LIMITED WARRANTY FOR ROTO MOULDED CONTAINERS

Peli Products, S.L.U. ("Peli") warrants to the original purchaser of its rotationally moulded containers that its containers will be free of defects in materials and workmanship for a period of one year from the date of invoice. Such warranty does not cover any associated hardware including closure hardware, retractable handles, wheels, and fasteners, which Peli warrants against defects in materials and workmanship for a period of 90 days from the invoice date. To the extent permitted by law, Peli's liability is limited to the case and not its contents or foam. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

For complete warranty details, see www.peli.com/en/content/guarantee-excellence

U.S.A.

U.S.A. & GLOBAL

23215 Early Avenue Torrance, CA 90505 USA Tel 310.326.4700 800.473.5422 (Outside CA) Fax 310.326.3311

DEERFIELD

147 North Main Street South Deerfield, MA 01373 Tel (800) 542-7344 Fax (413) 665-8330

EMEA

FOR INFORMATION ON PELI LIGHTS, PELI CASES AND PELI STORM CASES

PELI HARDIGG CASES USA HEADQUARTERS

EUROPE, MIDDLE EAST & AFRICA HQ PELI PRODUCTS, S.L.U. C/ Provença, 388 Planta 7 08025 • Barcelona. Spain

Tel +34 934 674 999 Fax +34 934 877 393 E-mail: info@peli.com www.peli.com

FRANCE

PELI

©2013 Peli Products S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., a U.S. corporation, its subsidiaries and/or affiliates.

All details included in this brochure are correct when printed but for most updated information please visit www.peli.com

PELI PRODUCTS FRANCE S.A.S. 487 rue Léopold Le Hon 01000 • Bourg en Bresse, France Tel +33 4 74 22 80 40 Fax +33 4 74 22 09 34 www.peli.com

PELI PRODUCTS GERMANY GmbH Graf-Adolf-Platz 15

40213 • Düsseldorf, Germany Tel +49 (0) 211 882 42 401 Fax +49 (0) 211 882 42 200

ADVANCED AREA LIGHTING GROUP PELI AALG LTD.

4 Chater Court Halifax Drive • Market Deeping
Peterborough PE6 8AH, United Kingdom Tel +44 (0) 1778 349000 Fax +44 (0) 1778 349004

PELICAN PRODUCTS MIDDLE EAST

JAFZA 13 office 032, P.O. Box 261008 Jebel Ali - Dubai - United Arab Emirates Tel +971 (0)4 8876550 Fax + 971 (0)4 8876549

* We also have offices in Canada, Japan, China, Australia, South Korea and India.

Part No. 0030-RTP-001E JAN 13

FOR INFORMATION ON PELI HARDIGG CASES IN EUROPE:

PELI-HARDIGG UK CASE CENTER Unit 4, Brookfield Industrial Estate Leacon Road Ashford Kent TN23 4TU United Kingdom Tel +44 (0) 1233 895895 Fax +44 (0) 1233 895899

PELI-HARDIGG FRANCE CASE CENTER

20/22 Rue des Petits Hôtels 75010 Paris, France Tel +33 (0)1 44 83 95 63 Fax +33 (0)1 44 83 95 68







- fire and rescue operations









ROTO PACK FULL LINE BROCHURE

> LARGE, X-LARGE, XX-LARGE RUGGEDISED SHIPPING CASES

Transport and protect big equipment in our Large, X-Large, or XX-Large Ruggedised Shipping Cases. These cases are lightweight, shockproof, watertight, dustproof, heat and chemical-resistant, which makes them extremely tough. Ultimate protection that will move your equipment from point A to point B without a scratch.













> SPECIALTY PRODUCTS

SPECIALTY PRODUCTS SPECIFICATIONS

Our specialty products are well engineered portable workspace solutions. These specialty products range from portable desks that set up in minutes to storage chests with metal drawers and dividers to keep all your supplies safe and organised. For protecting personal gear, our footlockers and trunklockers are lightweight and lockable. Whatever your need, whatever the environment, we have a durable solution to keep the job moving along.

> x-LARGE RUGGEDISED SHIPPING CASES > LARGE RUGGEDISED SHIPPING CASES AL2013-0903-110 AL2624-1805-110 AL3018-1505-110 AL4024-1305-110 AL3418-1005-110 > x-LARGE RUGGEDISED SHIPPING CASES > XX-LARGE RUGGEDISED SHIPPING CASES AL5415-1026-110 AL3834-1617-110 AL5424-2306-110



	LARGE RUGGEDISED SHIPPING CASES				> x-LARGE RUGGEDISED SHIPPING CASES			>xx-large ruggedised shipping cases		
CATALOGUE NUMBER	AL1616-0505-110	AL2013-0903-110	AL2624-1805-110	AL3018-1505-110	AL3418-1005-110	AL4024-1305-110	AL5415-1026-110	AL6912-1003-110	AL5424-2306-110	AL3834-1617-110
Interior Dimensions	15.75" x 15.88" x 10.54" (40 x 40.3 x 26.8 cm)	19.90" x 13.00" x 12.30" (50.5 x 33 x 31.2 cm)	26.40" x 24.00" x 22.90" (67 x 60.9 x 58.1 cm)	29.75" x 1787" x 20.12" (75.6 x 45.4 x 51.1 cm)	34.18" x 17.87" x 15.37" (86.8 x 45.4 x 39 cm)	39.87" x 24.31" x 18.00" (101.2 x 61.7 x 45.7 cm)	54.62" x 15.88" x 35.88" (138.7 x 40.3 x 91.1 cm)	69.37" x 12.00" x 14.09" (176.1 x 30.5 x 35.8 cm)	53.87" x 23.93" x 28.87" (136.8 x 60.8 x 73.3 cm)	38.12" x 34.12" x 33.00" (96.8 x 86.6 x 83.8 cm)
Exterior Dimensions	18.75" x 18.88" x 12.19" (47.6 x 48 x 31 cm)	22.90" x 16.00" x 13.90" (58.1 x 40.6 x 35.3 cm)	29.10" x 27.00" x 26.60" (73.8 x 68.6 x 67.6 cm)	32.75" x 20.87" x 21.93" (83.2 x 53 x 55.7 cm)	37.18" x 20.87" x 17.31" (94.4 x 53 x 44 cm)	42.87" x 27.31" x 20.19" (108.8 x 69.3 x 51.3 cm)	57.06" x 18.87" x 39.62" (144.9 x 47.9 x 100.6 cm)	72.37" x 15.00" x 16.28" (183.8 x 38.1 x 41.4 cm)	56.87" x 26.93" x 33.75" (144.4 x 68.4 x 85.7 cm)	41.12" x 37.12" x 38.82 (104.4 x 94.3 x 98.6 cm)
Lid Depth*	5.12" (13 cm)	3.00" (7.6 cm)	5.10" (12.9 cm)	5.25" (13.3 cm)	5.30" (13.3 cm)	5.25" (13.3 cm)	25.88" (65.7 cm)	3.60" (9.1 cm)	6.12" (15.5 cm)	17.25" (43.8 cm)
Bottom Depth*	5.42" (13.8 cm)	9.30" (23.5 cm)	17.80" (45.2 cm)	14.87" (37.8 cm)	10.10" (25.7 cm)	12.75" (32.4 cm)	10.00" (25.4 cm)	10.49" (26.6 cm)	22.75" (57.8 cm)	15.75" (40 cm)
Weight*	14.5 lbs. (6.6 kg)	16.8 lbs. (7.6 kg)	38.5 lbs. (17.5 kg)	31.8 lbs. (14.4 kg)	30.6 lbs. (13.9 kg)	50.2 lbs. (22.8 kg)	98.2 lbs. (44.54 kg)	42 lbs. (19.1 kg)	104.3 lbs. (47.3 kg)	86.4 lbs. (39.2 kg)
Features	Comfort Grip Handles™ Reinforced corners and edges for additional impact protection Moulded-in ribs and corrugations for secure, non-slip stacking, columnar strength and added protection Positive anti-shear locks, which prevent lid separation after impact Recessed hardware for extra protection			Comfort Grip Handles™ • Positive anti-shear locks, which prevent lid separation after impact Reinforced corners and edges for additional impact protection Moulded-in ribs and corrugations for secure, non-slip stacking, columnar strength and added protection Recessed hardware for extra protection			Comfort Grip Handles [™] • Positive anti-shear locks, which prevent lid separation after impact Reinforced corners and edges for additional impact protection Moulded-in ribs and corrugations for secure, non-slip stacking, columnar strength and added protection Recessed hardware for extra protection			
Application Examples	Trade show support materials, shipping, portable general storage				Trade show support materials, shipping, portable general storage			Trade show support materials, shipping, portable general storage		

^{*}All dimensions and weights are approximate. All shipping cases are available exclusively in black





For flat screen transportation -Accommodates most 42" (106 cm) to 50" (127 cm) screens


CATALOGUE	SINGLE FIELD DESK	DOUBLE DUTY FIELD DESK
NUMBER	FD3121-0000-130	FD3429-0000-130
Collapsed	30.70" x 21.00" x 28.50"	34.00"x 28.50"x 24.90"
Form	(77.9 x 53.3 x 72.4 cm)	(86.4 x 72.4 x 63.2 cm)
Extended	61.40" x 28.50" x 28.50"	102.00" x 28.50" x 28.50"
Form	(156 x 72.4 x 72.4 cm)	(259.1 x 72.4 x 72.4 cm)
Weight*	81.3 lbs. (37 kg)	100 lbs. (45.5 kg)
Features	1 Large work surface, chair, and drawers 1 G Drawers: 2 shallow (padlock for extra security), 2 deep, 2 file sizes 1 Chair: load rated to 300 lbs. (136 kg each) Airtight and watertight	2 Large desk surfaces, with rolling casters 6 Drawers: 2 shallow (padlock for extra sec 2 deep, 2 file sizes 2 Casters 2 Chairs: Load rated to 300 lbs. (136 kg ea Airtight and watertight
Application	Command centers, Construction sites,	Command centers, Construction sites,
Examples	Emergency aid shelters	Emergency aid shelters

FOOTLOCKER

TRUNKLOCKER



SINGLE FIELD DESK

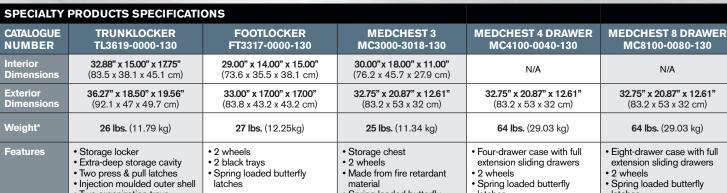

BLE DUTY FIELD DESK

Exterior Dimensions	36.27" x 18.50" x 19.56" (92.1 x 47 x 49.7 cm)	33.00" x 17.00" x 17.00" (83.8 x 43.2 x 43.2 cm)	32.75" x 20.87" x 12.61" (83.2 x 53 x 32 cm)	32.75" x 20.87" x 12.61" (83.2 x 53 x 32 cm)	32.75" x 20.87" x 12.61" (83.2 x 53 x 32 cm)
Weight*	26 lbs. (11.79 kg)	27 lbs. (12.25kg)	25 lbs. (11.34 kg)	64 lbs. (29.03 kg)	64 lbs. (29.03 kg)
Features	Storage locker Extra-deep storage cavity Two press & pull latches Injection moulded outer shell Two organization trays Moulded-in stacking ribs Water resistant	2 wheels 2 black trays Spring loaded butterfly latches Airtight and watertight	Storage chest wheels Made from fire retardant material Spring loaded butterfly latches 3x5" (7.6 x 12.7cm) Card holder Airtight and watertight	Four-drawer case with full extension sliding drawers 2 wheels Spring loaded butterfly latches Full-extension ball-bearing slides Made from fire retardant material Airtight and watertight Customizable divider system	Eight-drawer case with full extension sliding drawers 2 wheels Spring loaded butterfly latches Full-extension ball-bearing slides Made from fire retardant material Airtight and watertight Customisable divider system One lockable drawer Removable stainless-steel work tray Comfort Grip Handles™
Application Examples	General storage, Tool storage, Emergency preparedness supplies	Command centers, Construction sites, Emergency aid shelters	Emergency response supplies, Medicines, Maintenance/Repair/ Operations Parts	Emergency response supplies and medicines	Emergency response supplies and medicines

^{*} All dimensions and weights are approximate. All specialty cases are available exclusively in OD green.

Forklift Skidrunner (one-piece moulded skid-runners provide clearance for forklift tines and pallet jacks)